


Collets system ER

DIN 6499

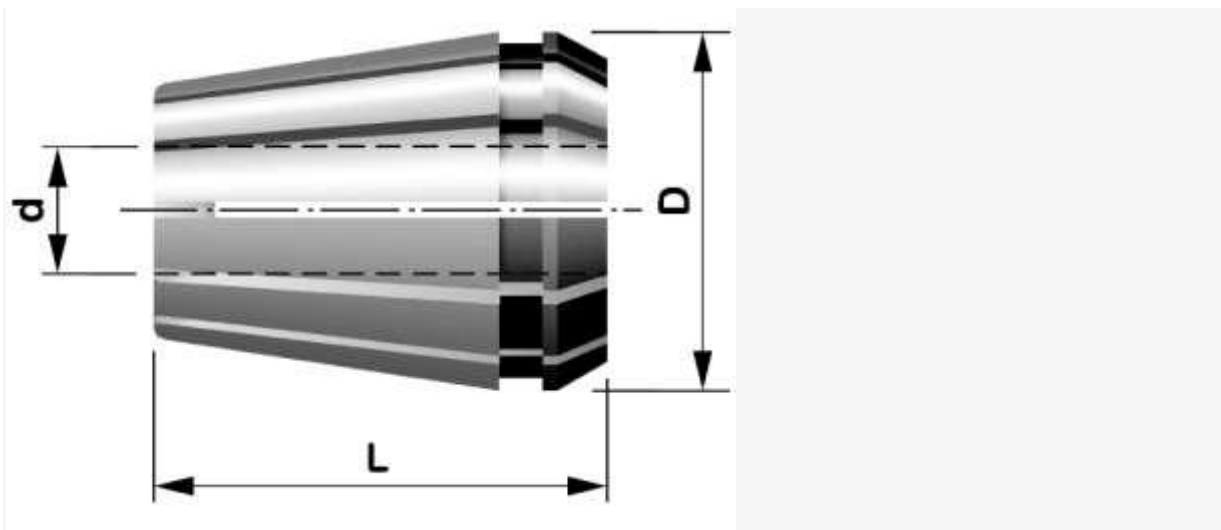

[Collet sets ER](#)

Note: Range of clamping d - 1,0 mm or d - 0,5 mm. Max. run-out 0,015 mm for $d \leq 10$ mm and 0,020 mm for $d > 10$ mm

	D [mm]	L [mm]
ER11	11.7	18.0
ER16	17.2	27.5
ER25	26.3	34.0
ER32	33.1	40.0
ER40	41.4	46.0

Chucking capacity	ER 11 Order number	ER 16 Order number	ER 25 Order number	ER 32 Order number	ER 40 Order number
1	591 042 - 01*	591 043 - 01*	591 044 - 01*		
1,5	591 042 - 02*	591 043 - 02*			
2	591 042 - 03*	591 043 - 03	591 044 - 02	591 045 - 01	
3	591 042 - 05*	591 043 - 05	591 044 - 03	591 045 - 02	591 046 - 01
4	591 042 - 07*	591 043 - 07	591 044 - 04	591 045 - 03	591 046 - 02
5	591 042 - 09*	591 043 - 09	591 044 - 05	591 045 - 04	591 046 - 03
6	591 042 - 11*	591 043 - 11	591 044 - 06	591 045 - 05	591 046 - 04
7		591 043 - 13	591 044 - 07	591 045 - 06	591 046 - 05
8		591 043 - 15	591 044 - 08	591 045 - 07	591 046 - 06
9		591 043 - 17	591 044 - 09	591 045 - 08	591 046 - 07
10		591 043 - 19	591 044 - 10	591 045 - 09	591 046 - 08
11			591 044 - 11	591 045 - 10	591 046 - 09
12			591 044 - 12	591 045 - 11	591 046 - 10
13			591 044 - 13	591 045 - 12	591 046 - 11
14			591 044 - 14	591 045 - 13	591 046 - 12
15			591 044 - 15	591 045 - 14	591 046 - 13
16			591 044 - 16	591 045 - 15	591 046 - 14
17				591 045 - 16	591 046 - 15
18				591 045 - 17	591 046 - 16
19				591 045 - 18	591 046 - 17
20				591 045 - 19	591 046 - 18
21					591 046 - 19
22					591 046 - 20
23					591 046 - 21
24					591 046 - 22
25					591 046 - 23
26					591 046 - 24