


ČSN 221432

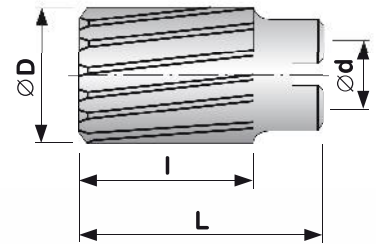

Objednáací číslo Order No. Bezeichnung Nr.	ØD mm	L mm	l mm	Ød mm			kg
B32025XF000S	25	45	32	13	10	0,090	
B32026XF000S	26	45	32	13	10	0,100	
B32027XF000S	27	45	32	13	10	0,110	
B32028XF000S	28	45	32	13	10	0,120	
B32029XF000S	29	45	32	13	10	0,130	
B32030XF000S	30	45	32	13	10	0,140	
B32031XF000S	31	50	36	16	10	0,160	
B32032XF000S	32	50	36	16	10	0,170	
B32034XF000S	34	50	36	16	10	0,185	
B32035XF000S	35	50	36	16	10	0,200	
B32036XF000S	36	56	40	19	10	0,230	
B32038XF000S	38	56	40	19	10	0,260	
B32040XF000S	40	56	40	19	10	0,290	
B32042XF000S	42	56	40	19	12	0,330	
B32044XF000S	44	63	45	22	12	0,435	
B32045XF000S	45	63	45	22	12	0,455	
B32046XF000S	46	63	45	22	12	0,475	
B32048XF000S	48	63	45	22	12	0,495	
B32050XF000S	50	63	45	22	12	0,515	
B32052XF000S	52	71	50	27	12	0,640	

Objednáací číslo Order No. Bezeichnung Nr.	ØD mm	L mm	l mm	Ød mm			kg
B32055XF000S	55	71	50	27	12	0,760	
B32058XF000S	58	71	50	27	12	0,830	
B32060XF000S	60	71	50	27	14	0,900	
B32062XF000S	62	80	56	32	14	0,970	
B32063XF000S	63	80	56	32	14	1,100	
B32065XF000S	65	80	56	32	14	1,160	
B32068XF000S	68	80	56	32	14	1,340	
B32070XF000S	70	80	56	32	14	1,500	
B32072XF000S	72	90	63	40	14	1,670	
B32075XF000S	75	90	63	40	14	1,810	
B32078XF000S	78	90	63	40	14	2,150	
B32080XF000S	80	90	63	40	14	2,240	
B32082XF000S	82	90	63	40	14	2,450	
B32085XF000S	85	90	63	40	14	2,590	
B32088XF000S	88	100	71	50	16	3,100	
B32090XF000S	90	100	71	50	16	3,170	
B32092XF000S	92	100	71	50	16	3,280	
B32095XF000S	95	100	71	50	16	3,430	
B32098XF000S	98	100	71	50	16	4,150	
B32100XF000S	100	100	71	50	16	4,170	

Poznámka: Pro upínání slouží držáky ČSN 241210 (DIN 217).
Note: For clamping are used arbors ČSN 241210 (DIN 217).
Bemerkung: Für das Spannen die Halter ČSN 241210 (DIN 217).

Poznámka: X = lícování výstružníku (7 = H7; 8 = H8; 1 = H11)
Note: X = tolerances of reamer (7 = H7; 8 = H8; 1 = H11)
Bemerkung: X = Reibahlenpassung (7 = H7; 8 = H8; 1 = H11)